


### INTERCOM/TALLY/PGM (D-sub 25P, Female)

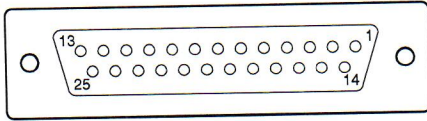


– EXT VIEW –

(0 dBu = 0.775 Vrms)

No.	Signal	Specifications
1	ENG (R) (X) OUT	ENG SYSTEM RECEIVE
2	ENG (R) (Y) OUT	0 dBu BALANCED
3	ENG (G)	GND for ENG
4	ENG (T) (X) IN	ENG SYSTEM TALK
5	ENG (T) (Y) IN	0 dBu BALANCED
6	PGM1 (X) IN	-20 dBu/0 dBu
7	PGM1 (Y) IN	(Selectable with
8	PGM1 (G) IN	S502/AVP board)
9	GND	GND for AUX
10	AUX3	
11	R TALLY (X) IN	ON : 24 Vdc, TTL (H), SHORT
12	R TALLY (Y) IN	OFF : 0 Vdc, TTL (L), OPEN
13	GND	CHASSIS GND
14	PROD (R) (X) OUT	PROD SYSTEM
15	PROD (R) (Y) OUT	RECEIVE 0 dBu BALANCED
16	PROD (G)	GND for PROD
17	PROD (T) (X) IN	PROD SYSTEM TALK
18	PROD (T) (Y) IN	0 dBu BALANCED
19	PGM2 (X) IN	-20 dBu/0 dBu
20	PGM2 (Y) IN	(Selectable with
21	PGM2 (G) IN	S503/AVP board)
22	AUX4	
23	AUX5	
24	G TALLY (X) IN	ON : 24 Vdc, TTL (H), SHORT
25	G TALLY (Y) IN	OFF : 0 Vdc, TTL (L), OPEN

### INTERCOM (5P, Female)




– EXT VIEW –

(0 dBu = 0.775 Vrms)

No.	Signal	Specifications
1	INCOM (T) IN (Y)	-20 dBu (CARBON MIC)
2	INCOM (T) IN (X)	-60 dBu (DYNAMIC MIC)
3	INCOM (T) IN (G)	GND for INCOM
4	INCOM (R) OUT (X)	Max. 12 dBu
5	NC	No connection

### 1-2-2. Cable Wiring Diagram

#### CCA-5 cable (RCP/CNU connector)

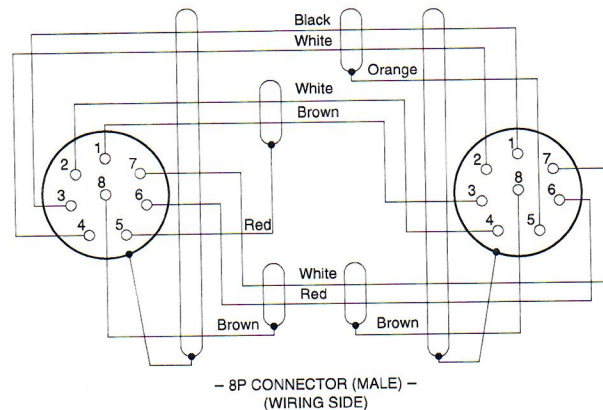

– 8P CONNECTOR (MALE) –  
(WIRING SIDE)